

Dry All

Full Range of HVAC&R Line Products



REPLACEABLE CORE SHELL


REPLACEABLE CORE SHELL

IMAGE, DRAWING & MODELS AVAILABLE



Sr. No.	Model No.	Connection Type	A		B		ØC		D		Qty for Cores	Liquid Flow Capacity for R-22 in Tons @1 psi
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
1	DRC - 485S	5/8"	235	9.25	158	6.22	114	4.49	152	5.98	1	21
2	DRC - 487S	7/8"	240	9.45	163	6.42	114	4.49	152	5.98	1	38
3	DRC - 489S	1-1/8"	242	9.53	165	6.50	114	4.49	152	5.98	1	53
4	DRC - 4811S	1-3/8"	242	9.53	165	6.50	114	4.49	152	5.98	1	61
5	DRC - 4813S	1-5/8"	242	9.53	165	6.50	114	4.49	152	5.98	1	85
6	DRC - 4817S	2-1/8"	250	9.84	163	6.42	114	4.49	152	5.98	1	120
7	DRC - 4821S	2-5/8"	245	9.65	152	5.98	114	4.49	153	6.02	1	124
8	DRC - 4825S	3-1/8"	244	9.60	144	5.66	114	4.49	153	6.02	1	128
9	DRC - 965S	5/8"	385	15.16	303	11.93	114	4.49	152	5.98	2	22
10	DRC - 967S	7/8"	387	15.24	308	12.13	114	4.49	152	5.98	2	41
11	DRC - 969S	1-1/8"	387	15.24	310	12.20	114	4.49	152	5.98	2	63
12	DRC - 9611S	1-3/8"	387	15.24	310	12.20	114	4.49	152	5.98	2	79
13	DRC - 9613S	1-5/8"	387	15.24	310	12.20	114	4.49	152	5.98	2	85
14	DRC - 9617S	2-1/8"	395	15.55	308	12.13	114	4.49	152	5.98	2	120
15	DRC - 9621S*	2-5/8"*	406.5	16.00	303.5	11.95	114	4.49	152	5.98	2	97
16	DRC - 9624S	3"	403	15.87	300	11.81	114	4.49	152	5.98	2	68
17	DRC - 9625S	3-1/8"	388	15.27	289	11.37	114	4.49	153	6.02	2	112
18	DRC - 1449S	1-1/8"	529	20.83	452	17.80	114	4.49	152	5.98	3	51
19	DRC - 14411S	1-3/8"	529	20.83	452	17.80	114	4.49	152	5.98	3	88
20	DRC - 14413S	1-5/8"	529	20.83	452	17.80	114	4.49	152	5.98	3	97
21	DRC - 14417S	2-1/8"	537	21.14	450	17.72	114	4.49	152	5.98	3	112
22	DRC - 19211S	1-3/8"	679	26.73	602	23.70	114	4.49	152	5.98	4	94
23	DRC - 19213S	1-5/8"	679	26.73	602	23.70	114	4.49	152	5.98	4	103
24	DRC - 19217S	2-1/8"	687	27.05	600	23.62	114	4.49	152	5.98	4	115
25	DRC - 19221S*	2-5/8"*	692.5	27.26	589.5	23.21	114	4.49	152	5.98	4	112
26	DRC - 19224S*	3"*	689	27.13	586	23.07	114	4.49	152	5.98	4	117

- 1) Maximum Working Pressure - 45 bar (653 psig)
- 2) Temperature Range : -40OC to +70OC
- 3)*Mark Connection Steel & Nickel Plated
- 4)1/4" NPT Connection is Available in Dry All Core Shell
- 5) [*] Denotes connections are of steel

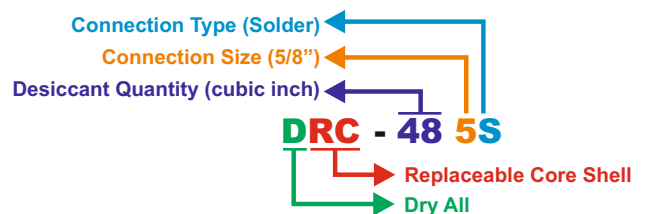

Manufactured by:



Full Range of HVAC&R Line Products

SAFE A&T Technology Private Limited

D-4, MIDC, Phase II, Dombivali (E),

Dist. Thane-421 201.

T : +91-(0)-251-2870680/81/82

M : +91-9619933838

Customer Care : +91 8181 994 994

E : info@dryall.net

W : www.dryall.net

REV23-02-01-00