


SUCTION LINE ACCUMULATOR WITH HEAT EXCHANGER




DIMENSIONAL DATA

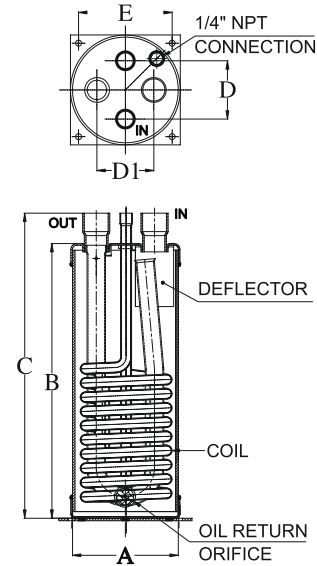

Sr. No.	Dry All Model	Holding capacity for R410A Liquid (Kg)	Connectio Size (inch)	Heat Exchanger Coil Conn Size (inch)	Dimensions										Mountng Details
					ØA		B		C		D1		D		
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	
1	ACCHX-4254-4S	1.5	1/2" ODS	3/8" ODS	102	4	254	10	290	11.42	48	1.89	64	2.50	M10 X 1.5 Pitch
2	ACCHX-4254- 5S	1.5	5/8" ODS	3/8" ODS	102	4	254	10	290	11.42	48	1.89	64	2.50	M10 X 1.5 Pitch
3	ACCMHX-5330-7S	3.2	7/8" ODS	1/2" ODS	127	5	330	13	368	14.47	70	2.76	70	2.76	Mountng Flange
4	ACCMHX - 6430-9S	6.5	1-1/8" ODS	5/8" ODS	152	6	430	17	467	18.37	70	2.76	70	2.76	Mountng Flange
5	ACCMHX-6635- 11S	7.5	1-3/8" ODS	5/8" ODS	152	6	635	25	679	26.71	70	2.76	70	2.76	Mountng Flange
6	ACCMHX-6635- 13S	7.5	1-5/8" ODS	3/4" ODS	152	6	635	25	694	27.32	70	2.76	70	2.76	Mountng Flange

*Note-Mounting Flange for 4" ACCHX Model is available as per customer requirement

Maximum working pressure: 450 psig.
Temperature Range: -40OC To +80OC.
Compatible with R134A, R22, R404A ,
R410A, R407C etc.

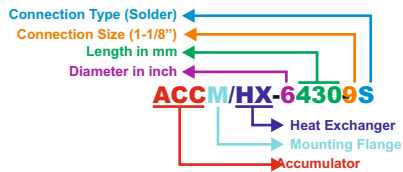

Manufactured by:



SAFE A&T Technology Private Limited

D-4, MIDC, Phase II, Dombivali (E),

Dist. Thane-421 201.

T : +91-(0)-251-2870680/81/82

M : +91-9619933838

Customer Care : +91 8181 994 994

E : info@dryall.net

W : www.dryall.net

REV23-04-02-00