

Dry All[®]

Full Range of HVAC&R Line Products




LIQUID REFRIGERANT RECEIVER (DEEP DRAW TYPE)

LIQUID REFRIGERANT RECEIVER (DEEP DRAW TYPE)


IMAGE, DRAWINGS & MODELS AVAILABLE



DIMENSIONAL DATA

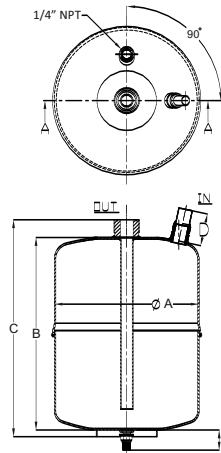

DRAWING-1

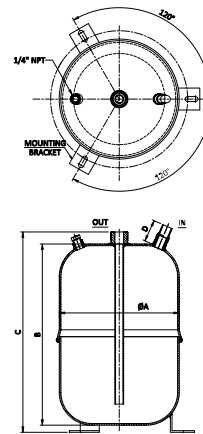

DRAWING-2

Liquid Refrigerant Receiver Deep Draw Type

Sr. No.	Model No.	Internal Volume (Capacity) Liters	Pump Down Capacity (KG)	Connection Sies		Dimension								Mounting Options	Refer Drawing No.	NPT Conn.	Liquid Indicator
				Inlet	Outlet\Rotolock Valve	ØA		B		C		D					
						mm	inch	mm	inch	mm	inch	mm	inch				
1	LRRVD-36-180-3S	1	0.92	3/8" ODF	1"-14 UNS* 3/8" ODF	91	3.58	180	7.09	210	8.27	53	2.09	M10X1.5 BOLT & NUT	1	NA	
2	LRRVD-47-210-3S	2	1.84	3/8" ODF	1"-14 UNS* 3/8" ODF	120	4.72	210	8.27	240	9.45	53	2.09				
3	LRRVD-59-270-4S	4	3.69	1/2" ODF	1"-14 UNS* 1/2" ODF	150	5.91	270	10.63	300	11.81	55	2.17				
4	LRRVD-70-240-5S	6	5.53	5/8" ODF	1-1/4"-12 UNF* 5/8" ODF	180	7.09	240	9.45	270	10.63	40	1.57	Three leg mounting	2	1/4"	
5	LRRVD-70-300-5S	8	7.37	5/8" ODF	1-1/4"-12 UNF* 5/8" ODF	180	7.09	300	11.81	332	13.07	40	1.57				
6	LRRVD-86-309-5S	10	10.35	5/8" ODF	1-1/4"-12 UNF* 5/8" ODF	219	8.62	300	11.81	348	13.70	40	1.57				
7	LRRVD-86-349-6S	12	12.42	3/4" ODF	1-1/4"-12 UNF* 3/4" ODF	219	8.62	350	13.78	400	15.75	42	1.65				

Maximum Working Pressure: 450 psig

Design temperature: -10° C to 100° C

[*] Denotes Connections are of Steel



Manufactured by:



Full Range of HVAC&R Line Products

SAFE A&T Technology Private Limited

D-4, MIDC, Phase II, Dombivali (E),

Dist. Thane-421 201.

T : +91-(0)-251-2870680/81/82

M : +91-9619933838

Customer Care : +91 8181 994 994

E : info@dryall.net

W : www.dryall.net

REV23-04-05-00