

Dry All[®]

Full Range of HVAC&R Line Products

UL US
LISTED



LIQUID REFRIGERANT RECEIVER (VERTICAL)

LIQUID REFRIGERANT RECEIVER (VERTICAL)

IMAGE, DRAWINGS & MODELS AVAILABLE



No.	DIMENSIONAL DATA						
	TOP VIEW	TOP VIEW	TOP VIEW	TOP VIEW	FRONT VIEW	FRONT VIEW	FRONT VIEW
	Drawing - 1	Drawing - 2	Drawing - 3	Drawing - 4	Drawing - 5	Drawing - 6	Drawing - 7

No.	Model No.	Internal Volume Capacity (Liters)*	Pump Down Capacity (KG)	Connection		Dimension								Mounting Option	Refer Drawing No.	Liquid Indicator	Inbuilt Fusible Plug	
				Inlet	Outlet	ØA		B		C		D						E
						mm	inch	mm	inch	mm	inch	mm	inch	mm	inch			
UL LISTED																		
1	LRRV-3350-3SX3S	1.4	1.4	3/8" ODF (COPPER)	3/8" ODF (COPPER)	76.2	3	350	13.78	41	1.62	NA	NA	NA	NA	M8 X1.25 Bolt & Nut	1	Not Applicable
2	LRRV-3482-3SX3S	2.0	1.9			482	18.87	41	1.62	NA	NA	NA	NA	NA	NA	M10 X 1.5 Bolt & Nut	2	Not Applicable
3	LRRV-5296-3SX5R	3.3	2.7	1/2" ODF (COPPER)	1"-14 UNS*	127	5	296	11.65	183	7.20	60	2.36	NA	NA	Sqaure Flange	3	Not Applicable
4	LRRV-5376-4SX5R	4.3	3.5					376	14.81			74	2.91					
5	LRRV-5456-4SX5R	5.2	4.3					456	17.96			86	3.38					
6	LRRV-5536-4SX5R	6.1	5.0					536	21.11			106	4.17					
7	LRRV-5566-5SX5R	6.4	5.3	5/8" ODF (COPPER)	1"-14 UNS*	152.4	6	566	22.28	160	6.29	111	4.37	130	5.12	Sqaure Flange	3	Yes
8	LRRV-6465-4SX5R	7.4	6.1	1/2" ODF (COPPER)				465	18.31			93	3.66					
9	LRRV-6526-5SX5R	8.4	6.9	5/8" ODF (COPPER)				526	20.71			106	4.17					
10	LRRV-6587-5SX5R	9.5	7.7					587	23.12			117	4.60					
11	LRRV-6648-5SX5R	10.4	8.6	7/8" ODF (COPPER)	648	25.52	128	5.03										
12	LRRV-6709-5SX5R	11.4	9.4		709	27.92	139	5.47										
13	LRRV-6770-7SX7R	12.4	10	7/8" ODF (COPPER)	1-1/4"-12 UNF*	770	30.32	150	5.90	150	5.90	150	5.90	NA	NA	4	Not Applicable	

Note:

MWP for above Receivers with UL is 450 Psig.

Can be custom built with MWP as 653 Psig

Fusible relief temperature = 221°C

[*] Denotes Connections are of Steel

Rotolock valve has to be ordered separately.

Rotolock	Sizes Available
1 - 14 UNS	3/8", 1/2", 5/8", 7/8"
1-1/4"-12 UNF	5/8", 3/4", 7/8", 1 1/8"

NON UL LISTED

No.	Model No.	Internal Volume Capacity (Liters)*	Pump Down Capacity (KG)	Inlet	Outlet	ØA	B	C	D	E	Mounting Option	Refer Drawing No.	Liquid Indicator	Inbuilt Fusible Plug					
						mm	inch	mm	inch	mm	inch								
14	LRRV-8446-7R(B)	15	10.3	1-1/4" 12 UNF	7/8" ODF	219	8	492	19.37	492	19.37	332	13.07	276.7	10.89	Bracket	5	Available	No
15	LRRV-8446-7SX5R(F)	15	10.3	7/8" ODF (COPPER)	1"-14 UNS*			446	17.56	357	14.06								
16	LRRV-8530-7RX7R(F)	17.8	13.0	1-1/4"-12 UNF*	1-1/4"-12 UNF*	530	20.87	224	8.82	441	19.09	NA	NA	Round	7				
17	LRRV-8588-7RX7R(F)	19.9	15.1			588	23.15	499	19.65										
18	LRRV-8732-7RX7R(F)	24.8	20.2	732	28.82	643	25.31	643	25.31	643	25.31	NA	NA	NA	NA				

Note :


Maximum working pressure: 600 psig

Design temperature: -10°C to 100°C

*Capacity mentioned as per ARI-495 @32°C

[*] Denotes Connections are of Steel

Rotolock valve has to be ordered separately.

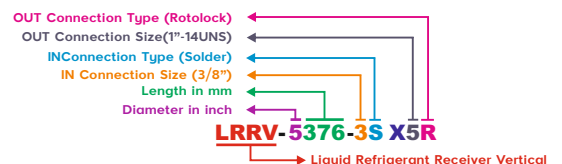

**Check Hologram for
Genuine Product**

Manufactured by:

Dry All
Full Range of HVAC&R Line Products

SAFE A&T Technology Private Limited

D-4, MIDC, Phase II, Dombivali (E),
Dist. Thane-421 201.

T : +91-(0)-251-2870680/81/82

M : +91-9619933838

Customer Care : +91 8181 994 994

E : info@dryall.net

W : www.dryall.net

File No.: L/S&M/01

REV23-04-03-00